


Appearance						
Shape	K shape	L shape	F shape	R shape	U shape	
Sensing distance	5mm (Slot width)					
Standard sensing object	Opaque objects (Size: > 1.2*1.8mm)					
Repeat accuracy	< 0.03mm					
Output type	NPN or PNP open-collector					
Switch type	Selectable L.on/D.on					
Indicator	Light off when objects are detected; light on when no objects are detected					
Response frequency	3KHz					
Light source	Infrared LED (940nm)					
Operating voltage	5~24V DC					
Voltage drop	< 1V(Load current 50mA)					
Current brightness	≤ 16mA					
Protective circuit	Surge protection , Reverse polarity protection					
Ambient brightness	Incandescent lamp< 1000 Lux					
Ambient temperature	Operation: -25°C~+55°C, Storage: -30°C~+80°C, no freezing					
Ambient humidity	Operation: 5%~85%, Storage: 5%~95%, no condensation					
Withstand voltage	AC, 1000V for 1 minute, between all power connection terminals and housing					
Anti-vibration	10 to 55 Hz with 1.5mm amplitude for 2 hours each in X, Y, and Z directions					
Insulation resistance	20MΩ or more between all power connection terminals and housing (based on DC250V)					
Degree of protection	IP50					
Material	ABS					
Connection method	2M 4core cable					
Model No.	NPN	<b>SK-206NA-W</b>	<b>SL-205NA-W</b> <span style="color:red">HOT</span>	<b>SF-202NA-W</b>	<b>SR-204NA-W</b>	<b>SU-201NA-W</b>
	PNP	<b>SK-206PA-W</b>	<b>SL-205PA-W</b>	<b>SF-202PA-W</b>	<b>SR-204PA-W</b>	<b>SU-201PA-W</b>

- Fiber Optic
- Slot Sensors**
- Photoelectric
- Laser
- Proximity
- Displacement
- Magnetic
- Contact
- Area
- Ultrasonic
- Vision
- Code Readers
- Vibration
- Temperature
- Accessories


## Dimensions

Unit: mm


### K Shape

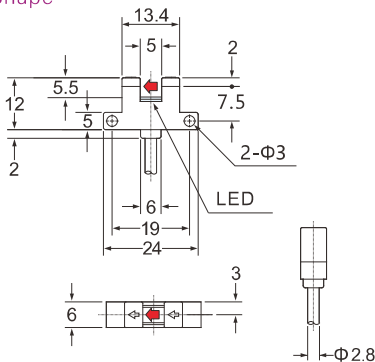


### L Shape

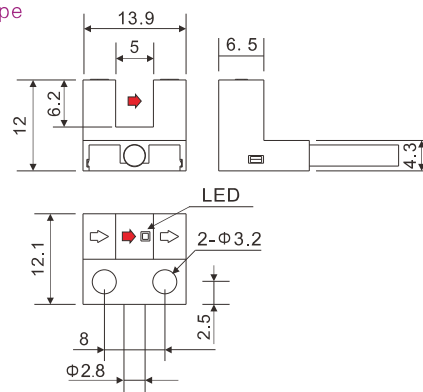

### F Shape

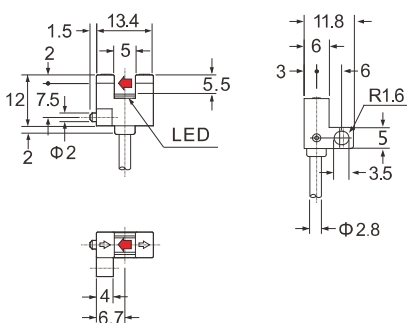

### R Shape

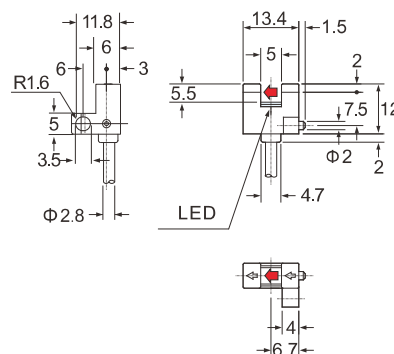


- Slot type sensors
- Micro slot type**
- Slot type
- Wide slot type
- Label detection

# Micro Slot Type

## Dimensions


Unit: mm

U Shape

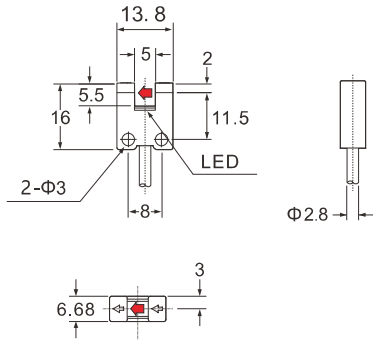


## Circuit diagram

NPN

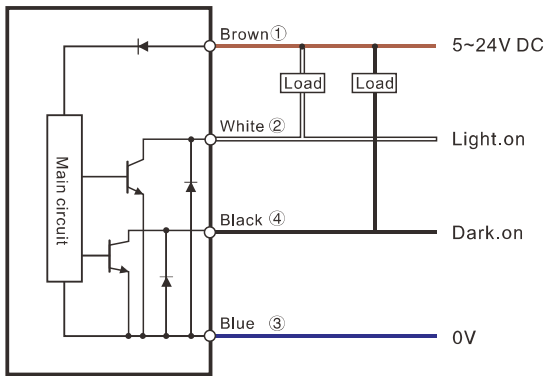

PNP

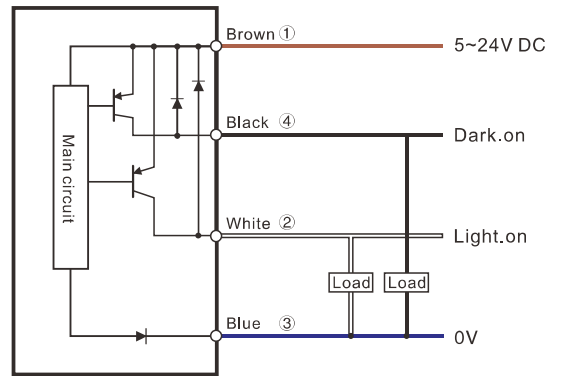

- Fiber Optic
- Slot Sensors
- Photoelectric
- Laser
- Proximity
- Displacement
- Magnetic
- Contact
- Area
- Ultrasonic
- Vision
- Code Readers
- Vibration
- Temperature
- Accessories

Guidance

Slot type sensors

- Micro slot type
- Slot type
- Wide slot type
- Label detection